

Making the Best Threads

How you cut steel pipes has a great influence on the shape of a thread

1) Use the most appropriate cutting tool for the type of pipe used.

Depending on your intended use, refer to the following for cutting steel pipes used for construction equipment.




Type	Blade	Appropriate REX Products	Steel Pipe	Stainless Steel Pipe
Band saw cutting machine	 Band saw	Mantis 125/120A/180WS/180WA	OK	OK
Circular saw cutting machine	 Circular saw	Carbide cutter TC-20 -150	OK	×
Pipe cutter	 Cutter wheel	Cutter on pipe machine (standard equipment)	OK	OK*

Table 1. Types of Cutter and their use

\* Optional cutter wheel

2) Cutting precision has a great influence on the shape of the thread.

Only use pipes with a flat, right-angled cut. Avoid using pipes with a slant or step of more than 1 mm. (Fig. 1)

- When a thread is cut on a steel pipe that has been correctly cut at right angles, the 4 dies work in unison to cut a perfect thread. (Fig. 2)
- When a thread is cut on a steel pipe where the end of the pipe is slanted or has steps, the result is a polygonal thread or a pipe of uneven thickness. (Fig. 3)

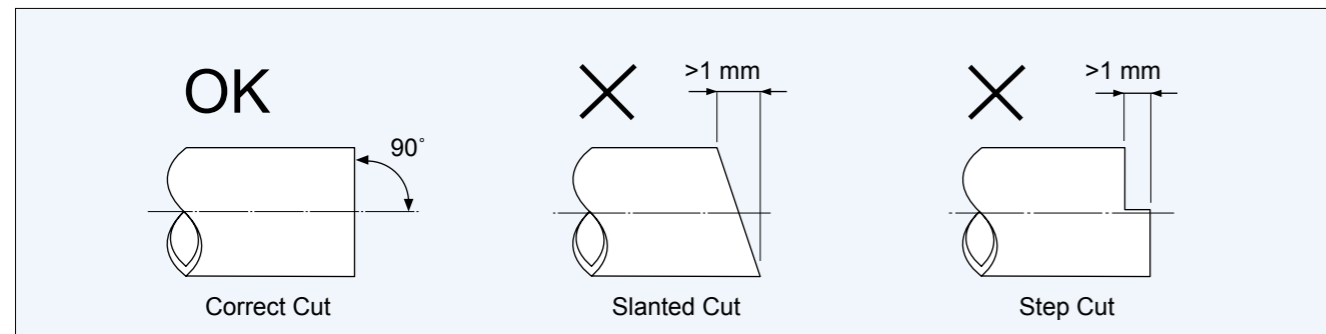


Fig. 1 Acceptable and unacceptable pipe ends

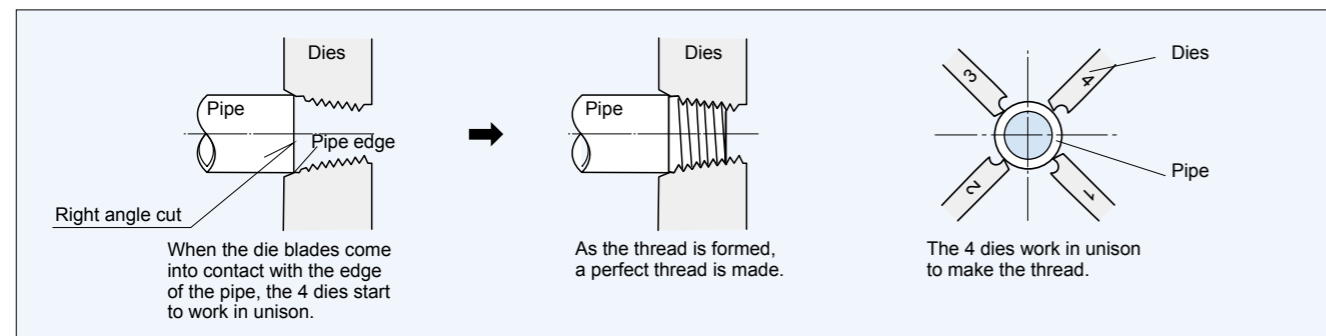


Fig. 2 Principle of cutting threads with a set of dies

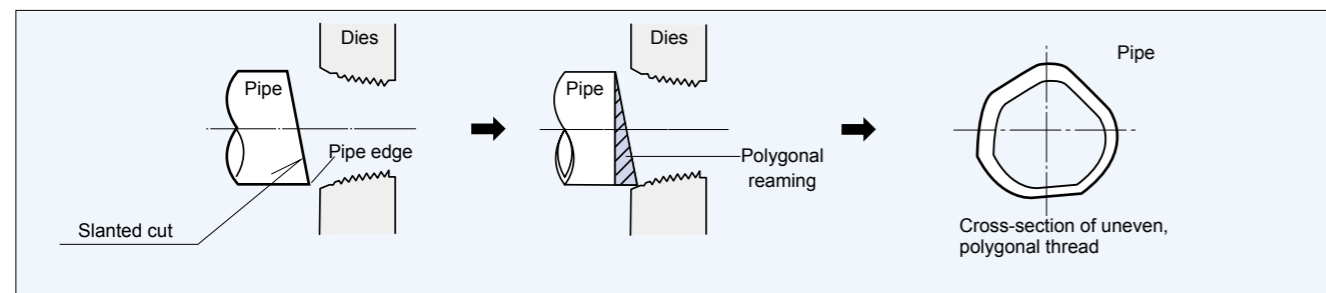


Fig. 3 Principle of polygonal threads

Using the right oil means consistent finishes and increases the life of the dies

1) Cutting oil comes in 3 types: for use with tap water pipes, general plumbing, and stainless steel pipes.

As shown in the table below, use the correct cutting oil according to the type of pipe. (Table 2)

Note: Using cutting oil for stainless steel on steel pipes will result in imperfect threads and leakages.

Cutting oil	Type of pipe	Steel pipes for tap water	Stainless steel pipes	General plumbing pipes
For tap water pipes 50W-R, N50W		OK	×	OK
For general plumbing 246-R, N246		×	×	OK
For stainless steel pipes 100SW-R		×	OK	×

Table 2. Appropriate cutting oil

2) Changing cutting oil, and causes of a reduction in oil performance

If any of the following occurs, it means it is time to change the cutting oil.

- If the oil becomes cloudy: This is the result of water getting mixed into the oil. If the cutting oil contains more than 20% water, the life of the dies will be drastically reduced.
- If the oil turns black: When the amount of oil flowing from the die head is reduced, the surfaces where the pipe is cut get very hot and smoke is produced. This greatly reduces the performance of the oil.
- If the oil becomes 'shiny': This means that microscopic colloidal sediment or metal powder has become mixed in with the oil. Change the oil.

3) Amount of cutting oil

The oil coming from the die head should flow continuously without interruption, and no smoke should be produced.

Inspecting the Thread

· After making a thread, inspect it both visually and with a thread gauge to ensure it is accurate.


Inspection with a tapered thread ring gauge.

ISO 7/1 (JIS B0203) Male Tapered Thread for Pipe

\* a: standard distance from pipe edge

\* b, b': allowance from pipe edge along the axis

Thread is acceptable if the pipe edge is located between b and b' after you screw the pipe thread into the ring gauge with your hand. (Fig.4)

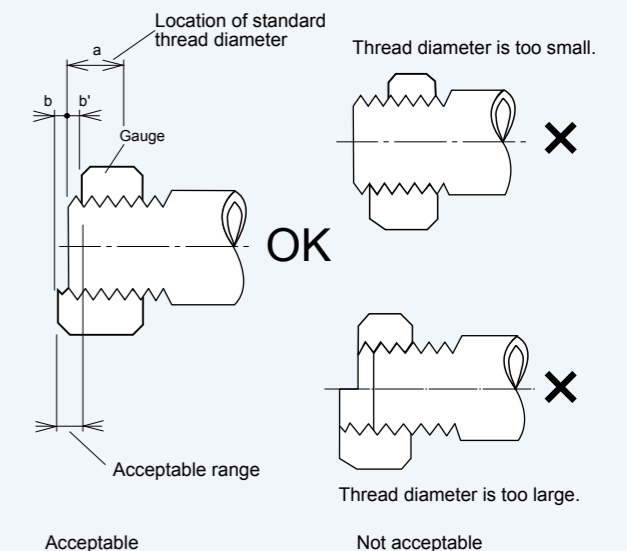

Gauge: see page 28.

Fig. 4 Inspecting the Thread