

REX

Pipe Threading Machine

NEW

F25A

A threading machine
you can carry
with just one hand !


8A - 25A (1/4" - 1")

Standard Model 1/2"-1"



Easy to carry


The mighty lightweight
Built in safety features, too

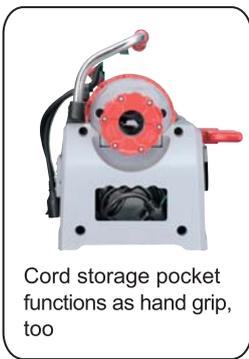

Cord storage pocket
functions as hand grip,
too



Anti-crash switch:
Switch protects
die head from touching
hand wheel

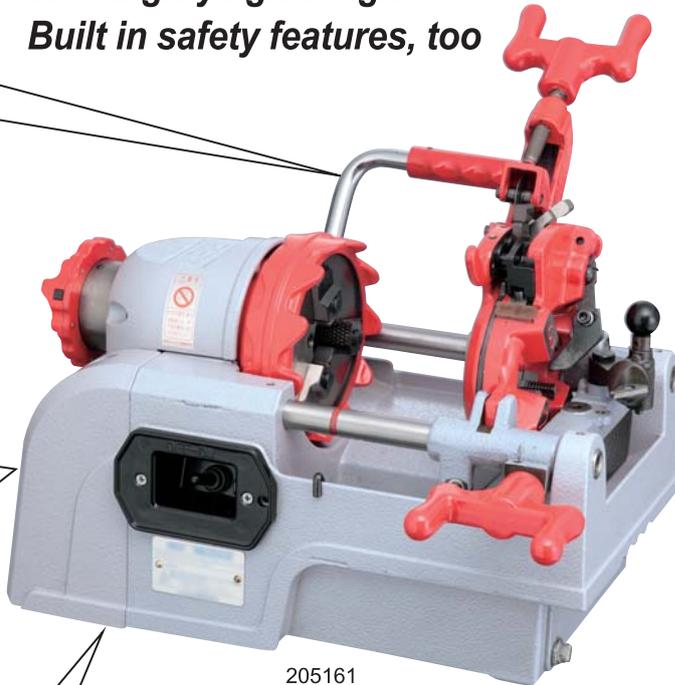

205161
F25A III with 1/2" - 1"
Self-opening die head



Self-opening
Die Head for F/NS25A



Manual-opening
Die Head for F/NS25A

	Code No.	Die Head	Voltage	Dies type
F25A	205151	Manual 1/4" - 1"	220 V	BSPT
	205153	Manual C19 - 39	220 V	C (conduit)
F25A III	205160	Self-opening 1/2" - 1"	110 V	BSPT / HSS
	205161	Self-opening 1/2" - 1"	220 V	BSPT

Threading Capacity (in.)	Voltage (50/60 Hz) AC (V)	Motor Single-Phase (Series)	Rotation Speed (Unloaded) (rpm)	Weight* (kg)	Dimensions L x W x H (mm)
1/4 - 1	110-120 or 220	Output 400 W	55	19.8 * without DH	440 x 329 x 356

Standard Accessories :

Carbon Brushes 1 pair, Cutting Oil (50W-R 1L x 2 or 100SW-R 0.5L x 4), Hex Key-wrench 3-5 mm, Dies 1/2"-3/8", 1" 1 set each, Die Head 1 pc

FEATURES

- Compact, lightweight, fast threading
- Double insulation motor employs a break to enhance safety.
- Optional self-opening die head for 1/4"-3/8" available

OPERABILITY

- Powerful Motor completes a 1" thread in only 16 seconds.
- Special ball bearings used for the main shaft bearing.
- Larger stroke for carriage move
- Carriage handle designed for easy operation
- Excellent durability provides improved machine service life and precision.

SAFETY

- Motor has a built-in brake designed to prevent entangling.
- Switch mechanism protects die head from colliding with the hand wheel when threading short pipes.
- Double insulation motor
- Motor equipped with auto-stop carbon brushes
- Low centre of gravity designed for safety

REX INDUSTRIES CO., LTD.

Overseas Sales Dept. & Factory :

1-9-3, Hishiya-higashi, Higashi-Osaka 578-0948 Japan

Tel.: +81-(0)72-961-9820 Fax.: +81-(0)72-961-9878

URL <http://www.rexind.co.jp>

F25A-E1
1901R 0000

Specifications, colour, etc. may be changed without prior notification.