


Manual pipe threader. No power supply required!

OSTER-TYPE RATCHET PIPE THREADER

8A - 50A (1/4" - 2")

- Ratchet facilitates smooth operation.
- Quick-release lever disengages dies, so there's no need to rotate the unit back again to release it.
- Made of cast iron, the main body is lightweight yet robust. Moving parts are heat-treated and reinforced to limit wear.

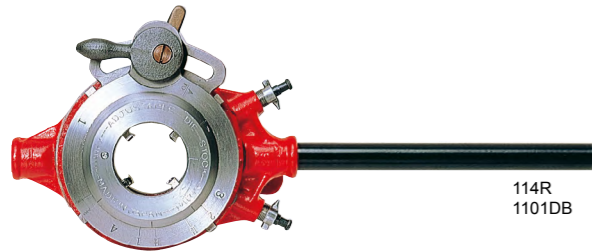

114R
1101DB

Code No.	Model	Capacity (in.)
1101D2	112R	1/4 - 1 1/4
1101DB	114R	1/2 - 2

Spare Dies



112R Dies 10A
150003

Code No.	Model	Capacity (in.)
150003	112R Dies 8A - 10A	1/4 - 3/8
150007	112R Dies 15A - 20A	1/2 - 3/4
150010	112R Dies 25A - 32A	1 - 1 1/4
151007	114R Dies 15A - 20A	1/2 - 3/4
151010	114R Dies 25A - 32A	1 - 1 1/4
151030	114R Dies 40A - 50A	1 1/2 - 2

BABY REED-TYPE RATCHET PIPE THREADER

8A - 32A (1/4" - 1 1/4")

- This compact and lightweight model ensures optimum threading in elevated or confined places. Ratchet supplied.
- Proven versatility in applications for gas/water supply pipes and thin steel conduits (by replacing dies).



2R4
1102R4

Code No.	Model	Capacity (in.)
1102R3	2R3	1/2 - 1
1102R4	2R4	1/2 - 1 1/4
1102RE	2RC	C19 - 39

Spare Dies



2RG Dies 10A
154003

Code No.	Model	Size (in.)
154001	2RG Dies 8A	1/4
154003	2RG Dies 10A	3/8
154005	2RG Dies 15A	1/2
154007	2RG Dies 20A	3/4
154009	2RG Dies 25A	1
154010	2RG Dies 32A	1 1/4
154207	2RC Dies 19	C19
154209	2RC Dies 25	C25
154210	2RC Dies 31	C31
154220	2RC Dies 39	C39

DROP THREADER 12R TYPE

6A - 50A (1/8" - 2")

Rex Drop Heads and Dies are ideal for in-place threading from 1/8" - 2" and are designed to fit Rex Ratchet Handle 112162 (BSPT) / 112160 (NPT) as well as Wheeler Ratchet Handle 43310, and other models, such as 12R, 00-R, 111-R, 0-R, 30A & 31A, 600 & 700 Power Drives, DHR 12 Series Drop Heads and BT 40000 Series Drop Heads.



With 11/2" Drop Head



12R BSPT
112051

MANUAL RATCHET THREADER SETS

Model and Code No.		Threading Capacity (in.) and standard dies set
12R BSPT	12R NPT	
112051*	112041*	1/8, 1/4, 3/8, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2
112055*	112045*	1/2, 3/4, 1, 1 1/4
112052*	112042*	1/2, 3/4, 1, 1 1/4, 1 1/2, 2
112053*	112043*	1, 1 1/4, 1 1/2, 2
112162*	112160*	Ratchet with handle, case only

* discontinued

Ideal for in-place threading from 1/8" to 2"

Nominal Pipe Size	12R TYPE DIES-BSPT		12R TYPE DIES-NPT		12R TYPE DIES-NPSM		12R TYPE DROP HEAD with DIES-BSPT		12R TYPE DROP HEAD with DIES-NPT	
	Code No.	Name	Code No.	Name	Code No.	Name	Code No.	Name	Code No.	Name
1/8"	112121	DIES 12R 1/8 PT	112101	DIES 12R 1/8 NPT	112111	DIES 12R 1/8 NPSM	112021	DH 12R 1/8 PT	112011	DH 12R 1/8 NPT *
1/4"	112122	DIES 12R 1/4 PT	112102	DIES 12R 1/4 NPT	112112	DIES 12R 1/4 NPSM	112022	DH 12R 1/4 PT	112012	DH 12R 1/4 NPT *
3/8"	112123	DIES 12R 3/8 PT	112103	DIES 12R 3/8 NPT	112113	DIES 12R 3/8 NPSM	112023	DH 12R 3/8 PT	112013	DH 12R 3/8 NPT *
1/2"	112124	DIES 12R 1/2 PT	112104	DIES 12R 1/2 NPT	112114	DIES 12R 1/2 NPSM	112024	DH 12R 1/2 PT	112014	DH 12R 1/2 NPT *
3/4"	112125	DIES 12R 3/4 PT	112105	DIES 12R 3/4 NPT	112115	DIES 12R 3/4 NPSM	112025	DH 12R 3/4 PT	112015	DH 12R 3/4 NPT *
1"	112126	DIES 12R 1 PT	112106	DIES 12R 1 NPT	112116	DIES 12R 1 NPSM	112026	DH 12R 1 PT	112016	DH 12R 1 NPT *
1 1/4"	112127	DIES 12R 1 1/4 PT	112107	DIES 12R 1 1/4 NPT	112117	DIES 12R 1 1/4 NPSM	112027	DH 12R 1 1/4 PT	112017	DH 12R 1 1/4 NPT *
1 1/2"	112128	DIES 12R 1 1/2 PT	112108	DIES 12R 1 1/2 NPT	112118	DIES 12R 1 1/2 NPSM	112028	DH 12R 1 1/2 PT	112018	DH 12R 1 1/2 NPT *
2"	112129	DIES 12R 2 PT	112109	DIES 12R 2 NPT	112119	DIES 12R 2 NPSM	112029	DH 12R 2 PT	112019	DH 12R 2 NPT *

* discontinued

MINI POWER DRIVE

6A - 50A (1/8" - 2")




Full view with REX VICE STAND CVX6

Lightweight and portable, the Rex Mini Power Drive can thread up to 2" diameter pipe or conduit and 1" bolt or rod in just seconds. Accepts 12R die heads with adapter. Requires only 1 1/4" clearance for working in trenches, overhead and in tight quarters. Mechanical high speed reverse speeds up removal after threading.



Mini power drive in action

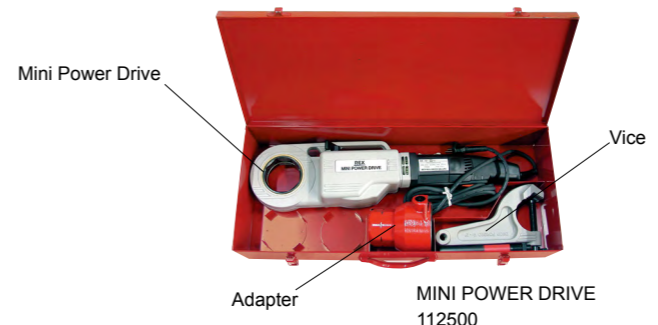

Mini Power Drive

Adapter

MINI POWER DRIVE
112500

Vice

Code No.	112500
Model	MINI POWER DRIVE
Threading capacity	1/8" - 2"
Type of thread	BSPT/ NPT
Threading speed	25 to 15 rpm
Fast reverse speed	58 rpm
Voltage	230 V, 50/60 Hz
Power consumption	1010 W
Switch	ON/OFF Dead man (Non-locking)
Machine weight	6.5 kg
Machine dimensions	580 (L) x 95 (W) x 140 (H) mm
Clamp weight	2.7 kg
Gross weight	16 kg
Carrying case dimensions	640 (L) x 263 (W) x 114 (H) mm