




In addition to their precision, toughness and variety, REX pipe threading machines offer these great features. Consumables can be replaced easily.

EASY MAINTENANCE

Easy to change the Dies




Dies can be changed without removing the Die-head from the machine.

Notches in the Dies click into position against spring balls in the Die-head to allow you to easily confirm the Dies have been installed correctly.


Easy to change the Chuck Jaw Inserts

Chuck jaw inserts can easily be changed using a hexagonal wrench. It's not necessary to disassemble the chuck, so maintenance can easily be performed even at site.




Easy to check and inspect the Oil Pump, too

Oil pump is readily accessible so it is easy to check. (Photo shows position of oil pump on a 2" machine)




Easy to change the Carbon Brushes

Carbon brushes come with a stopper so that when they are worn the motor stops automatically, which avoids damaging it.






Can be replaced through the windows on both sides of the main body.



Side

USER FRIENDLY

- Stronger than previous model and with a more luxurious touch.
- As the stroke is about 25mm longer than the previous model, it is easier to work with.
- Designed to reduce scraps getting entangled.





Die-cast body      Wider space      Scrap receiver




**Strong body, comfortable working space**

COMPATIBILITY

- While there are differences in the types of Die-head, the Dies for 1½" to 4" machines are mostly interchangeable.
- The ½" to 2" Manual DH, Uni-auto DH, NV-auto DH and Self-opening DH are compatible with the 50A, 80A and 100A.
- You can also attach REX portable groovers.
- The cutter wheels for the 40A, 50A, 80A, 100A and 150A are compatible.

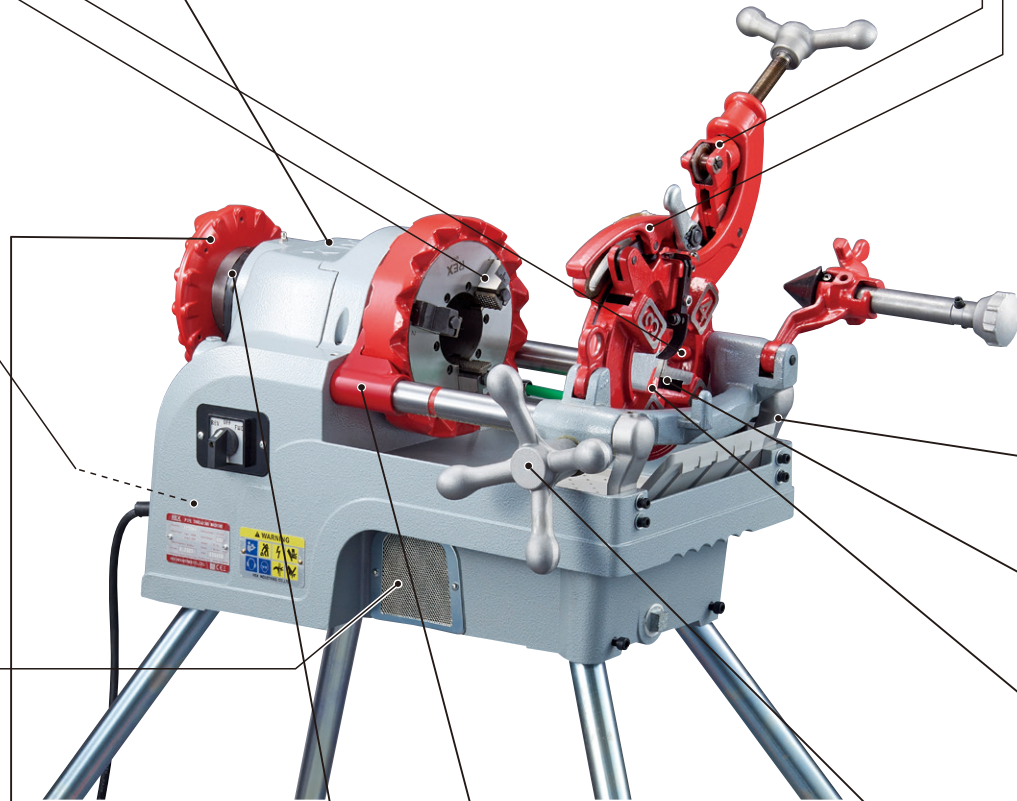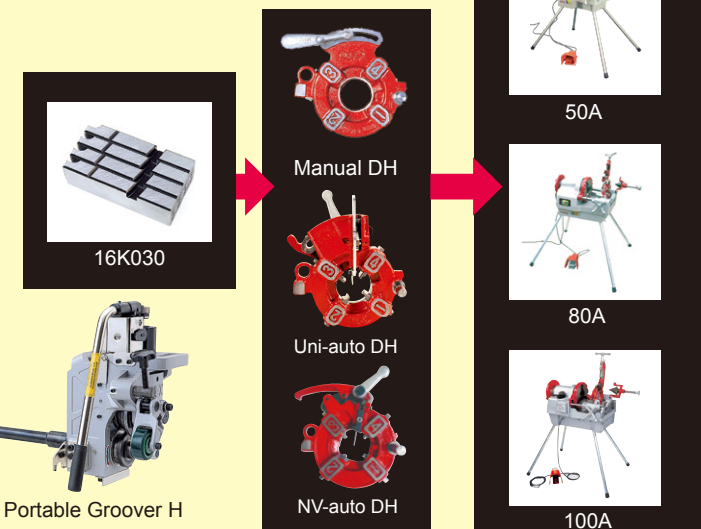

- Improve durability and operability of the switch



Push Button Switch (Non-CE)      Cam Switch (CE) & Foot switch

- Rear chuck jaws do not come out, resulting in enhanced operator safety.
- Safety collar protects operator's fingers.
- Carriage handle has four spokes for an easy, secure grip.
- Self-oiling function allows you to forget about oil flow when working with the machine.
- Two-step blade provides a stable bite allowing you to remove any external coating and cut the pipe at the same time (BSPT only).
- Adjust ring
- Take up any slack between the main shaft and the shaft bearing to keep the pipe steady.